


HEAT PIPE SPECIFICATION

Diameter	WICK TYPE			LENGTH			MOQ
	Gravity	Mesh	Copper Powder	Gravity	Mesh	Copper Powder	
Φ2	●		●	<100mm		<100mm	100pcs/Each
Φ3	●		●	<300mm		<300mm	
Φ4	●		●	<350mm		<350mm	
Φ6	●		●	<450mm		<450mm	
Φ8	●	●	●	< 1800mm	< 1800mm	< 550mm	
Φ10	●	●	●	< 1800mm	< 1800mm	< 550mm	
Φ12	●		●	< 1800mm		< 550mm	
Φ16	●		●	< 1800mm		< 550mm	
Φ20	●			< 1800mm		< 550mm	1000pcs/Each
Φ25.4	●		●	< 1800mm		< 550mm	
Φ30	●		●	< 1800mm		< 550mm	
Φ33	●		●	< 1800mm		< 550mm	
Φ40	●		●	< 1800mm		< 550mm	
Φ56	●		●	< 1800mm		< 550mm	

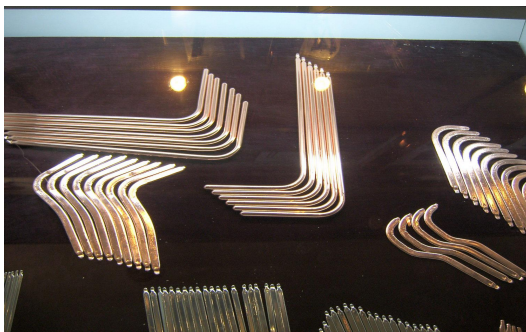

THIN TYPE HEAT PIPE

	WICK TYPE			Thickness (mm)	Width (mm)	MOQ
Diameter	Gravity	Mesh	Copper Powder			
Φ4		●		1±0.05	5.85±0.15	1000pcs/Each
				0.8±0.05	5.95±0.15	
Φ5		●		1±0.05	7.4±0.15	
				0.8±0.05	7.5±0.15	
Φ6		●		1±0.05	9±0.15	
				0.8±0.05	9.1±0.15	
	WICK TYPE			Thickness (mm)	Width (mm)	MOQ
Diameter	Gravity	Mesh	Copper Powder			
Φ5			●	1.5±0.05	7±0.15	1000pcs/Each
Φ6			●	1.5±0.05	8.65±0.15	

